




Top Bellows

(TBL2.5/20, TBL2.5/40)


for Magic Cup & Magic Gripper

Features and Strengths

- Soft materials can also be selected. (NBR, Silicone)
- Suitable for easily damaged products -> Contact food directly.
- Able to use as vacuum cylinder function-> applied for high speed application.
- No damage even if detergent is used when washing the product.
- Exchangeable different shape/ type of suction lips.
- Use the D2, B3, B4 Stoppers like MBL bellows.

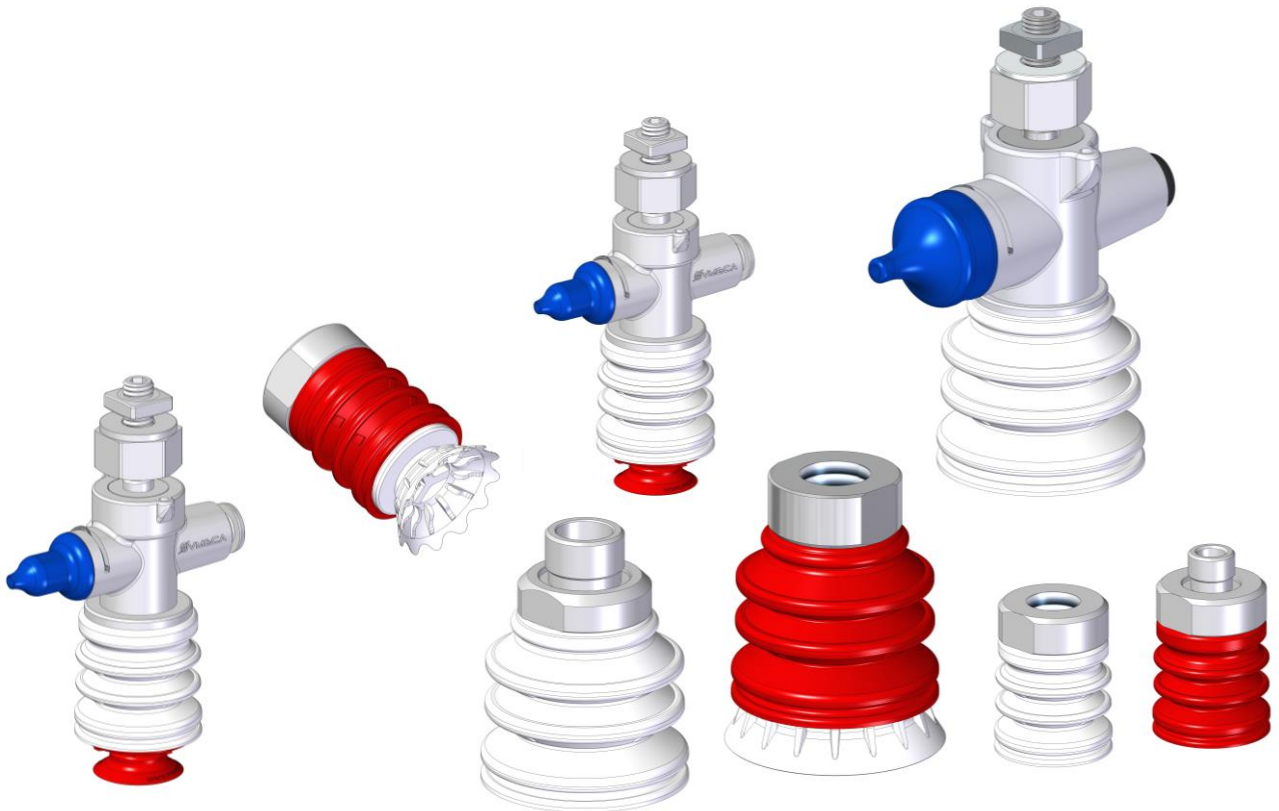

TBL bellows(TBL2.5/20, TBL2.5/40)

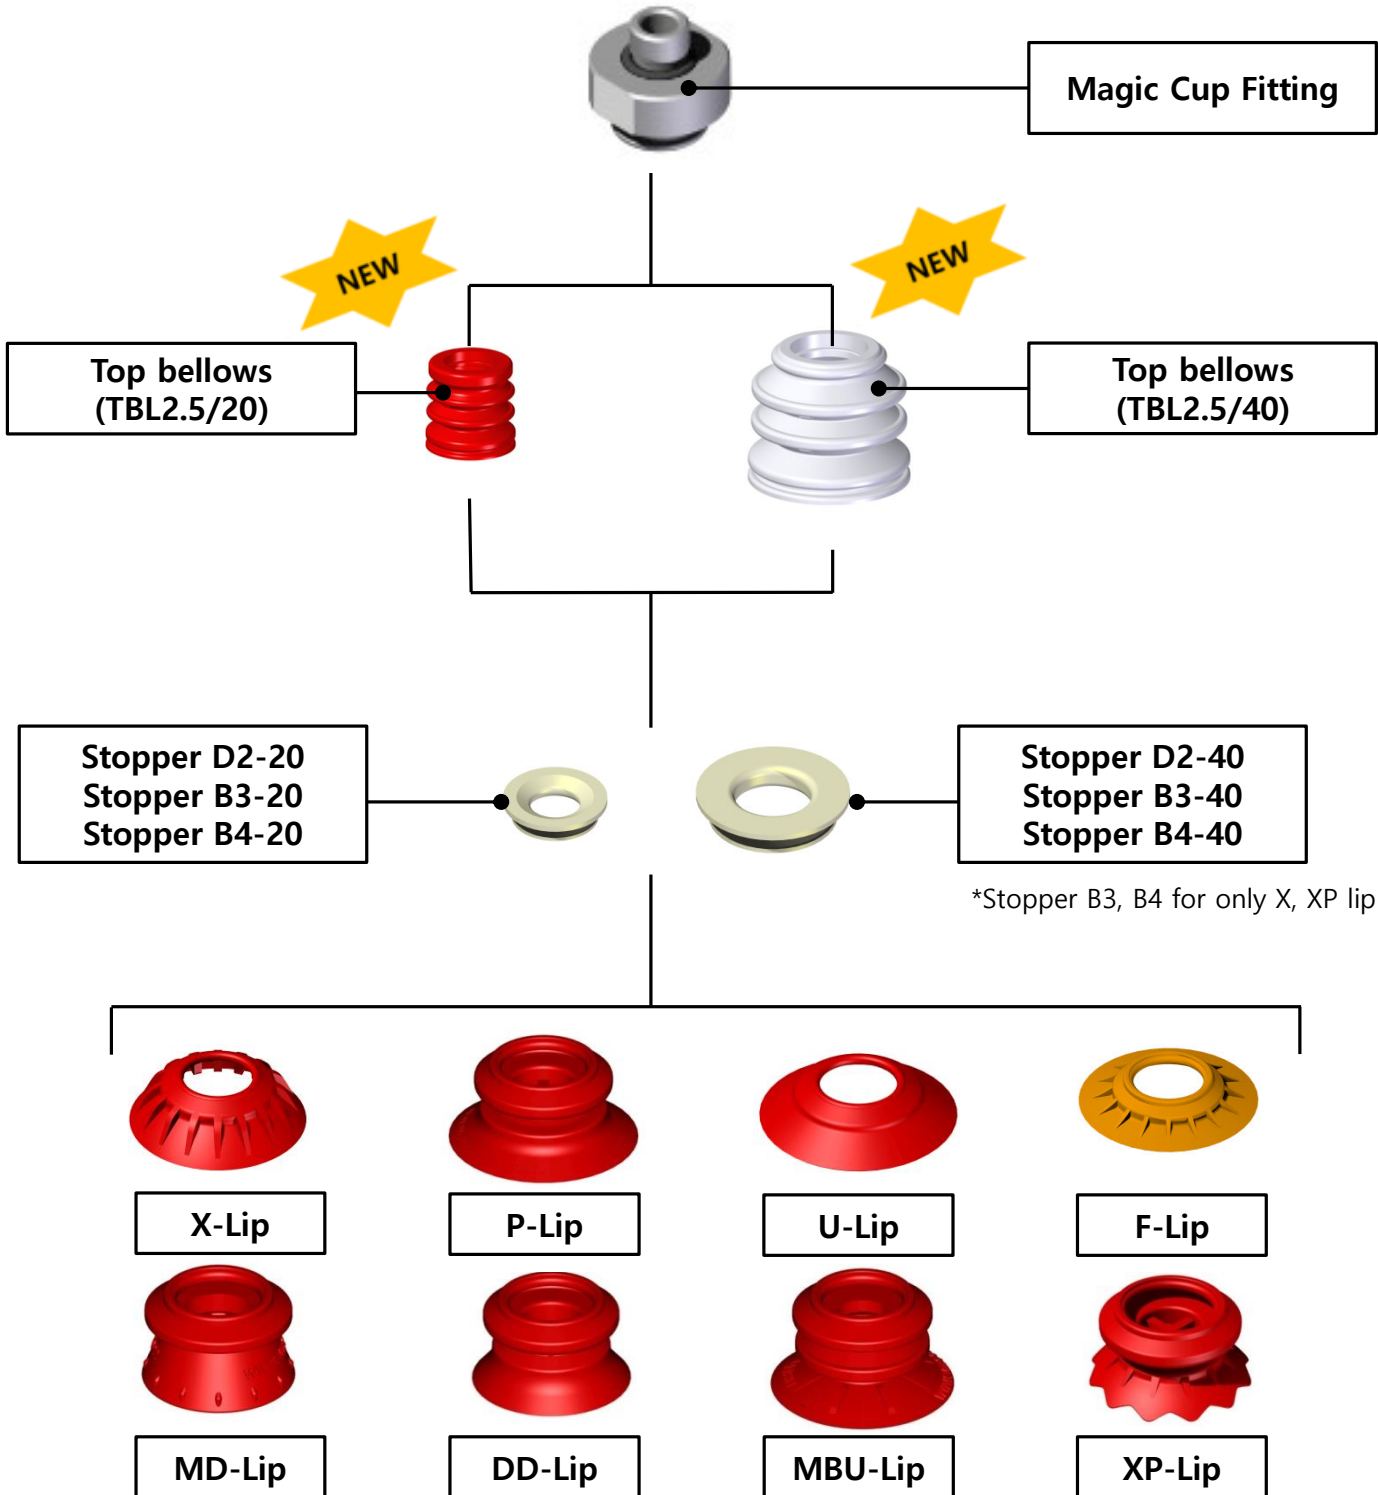

Build an Ordering No.



BL2.5/40 | **S5** -U45-W5- **D2** -F2-18M

①



②

③

① Top Bellow		② Top Bellows material		③ Stopper Type
Symbol	Description	Symbol	Material	
BL2.5/20	New Type Top Bellows, 20mm diameter. For 20mm diameter top bellows.	N6 S3 S5 W3 W5 W3(FDA) W5(FDA) U6	NBR (Nitrile), 60° hardness Silicone, 30° hardness Silicone, 50° hardness White Silicone, 30° hardness White Silicone, 50° hardness White Silicone, 30° hardness(FDA) White Silicone, 50° hardness(FDA) Urethane, 60° hardness	B3 B4 D2 *Stopper B3, B4 for only X, XP lip
BL2.5/40	New Type Top Bellows, 40mm diameter. For 40mm diameter top bellows.	N6 S3 S5 W3 W5 W3(FDA) W5(FDA) U6	NBR (Nitrile), 60° hardness Silicone, 30° hardness Silicone, 50° hardness White Silicone, 30° hardness White Silicone, 50° hardness White Silicone, 30° hardness(FDA) White Silicone, 50° hardness(FDA) Urethane, 60° hardness	B3 B4 D2 *Stopper B3, B4 for only X, XP lip



Top bellows(TBL2.5/20, TBL2.5/40)

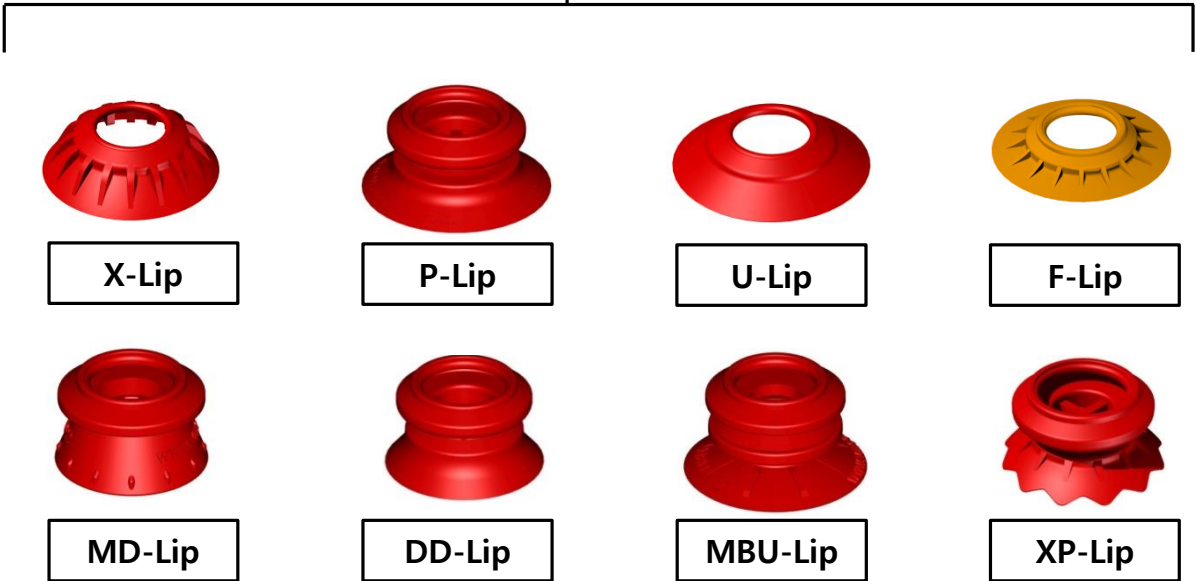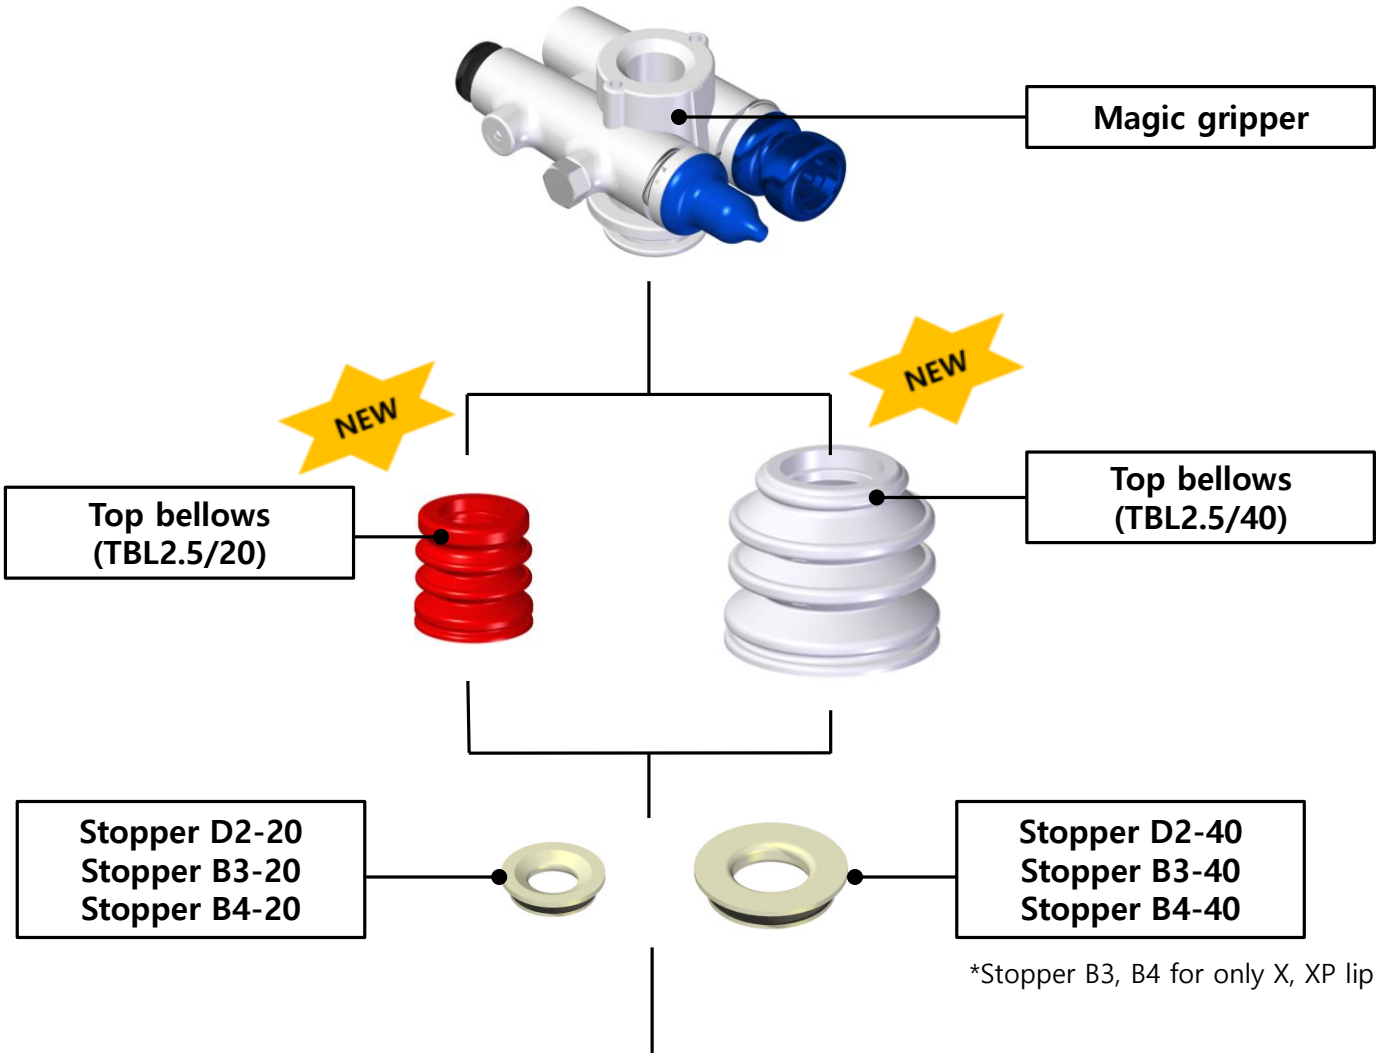

Build an Ordering No.



MC10AP - N **2BL20** **S5** F - X25S3 - **D2**

① ② ③

① Top Bellows		② Top Bellows material		③ Stopper Type
Symbol	Description	Symbol	Material	Symbol
2BL20	New Type Top Bellows 2.5Folds. For 20mm diameter top bellows.	N6	NBR (Nitrile), 60° hardness	B3 B4 D2 *Stopper B3, B4 for only X, XP lip
		S3	Silicone, 30° hardness	
		S5	Silicone, 50° hardness	
		W3	White Silicone, 30° hardness	
		W5	White Silicone, 50° hardness	
		W3(FDA)	White Silicone, 30° hardness(FDA)	
		W5(FDA)	White Silicone, 50° hardness(FDA)	
U6	Urethane, 60° hardness			
2BL40	New Type Top Bellows 2.5Folds. For 40mm diameter top bellows.	N6	NBR (Nitrile), 60° hardness	B3 B4 D2 *Stopper B3, B4 for only X, XP lip
		S3	Silicone, 30° hardness	
		S5	Silicone, 50° hardness	
		W3	White Silicone, 30° hardness	
		W5	White Silicone, 50° hardness	
		W3(FDA)	White Silicone, 30° hardness(FDA)	
		W5(FDA)	White Silicone, 50° hardness(FDA)	
U6	Urethane, 60° hardness			

