

3-Spindelköpfe

■ Modelle mit festem Spindelabstand (nicht verstellbar)


● Spannzangen-Ausführung

3 Spannzangen sind im Lieferumfang enthalten.


Auch in Stellhülsen-Ausführung lieferbar.



Abmessungen für 3D41-, 3D46-, 3D56-

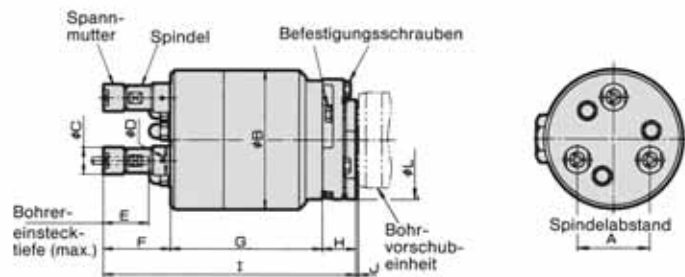

Abmessungen für 3D63-

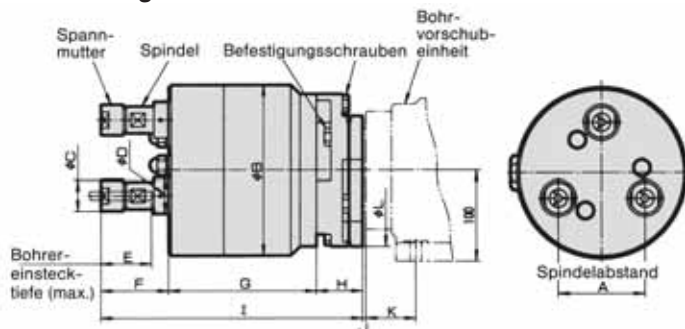

Abmessungen (mm)

Modell-Nr.	A	B	C	D	E	F	G	H	I	J	K	L
3D41-845BP	17 ~ 23	108	14,8	16,8	30	43,5	117	26	186,5	1	-	92
3D46-845BP							133		202,5			
3D41-2075BP	23 ~ 59	108	21	22,5	35	52	117	26	195	1	-	92
3D46-2075BP	59 ~ 94	148										
3D56-50130BP	41 ~ 84	148	34	40	56	75	160	39	274	2	-	128
3D63-50130BP	84 ~ 118	188										176

Modell-Nr.	Spindelabstand Min. ~ Max.	Spannbereich	Bestell-Nr. Spannzange	Anwendbar für Modellnummern
3D41-845BP	17 ~ 23	0,8 ~ 5,0	Z-00845- \emptyset Abstufung 0,1	E3C-6030 E3C-6022
3D46-845BP				E3C-1314 E3C-1309 E3C-1305
3D41-2075BP	23 ~ 94	2 ~ 7,5	Z-02075- \emptyset Abstufung 0,1	E3C-6030 E3C-6022
3D46-2075BP				E3C-1314 E3C-1309 E3C-1305
3D56-50130BP	41 ~ 118	5 ~ 13	Z-50130- \emptyset Abstufung 0,1	D3P-1305(L) D3P-1302(L)
3D63-50130BP				D5P-1320 D5P-1314 D5P-1311
				D6P-2414 D6P-2411 D6P-2408
				D6P-2407 D6P-2406 E6P-2405
				E6P-2404 E6P-2403 E6P-2402

1. Maximale Drehzahl 3000 U/min.

