

## 4-Spindelköpfe

### ■ Modelle mit festem Spindelabstand (nicht verstellbar)


#### ● Spannzangen-Ausführung

4 Spannzangen sind im Lieferumfang enthalten.


Auch in Stellhülsen-Ausführung lieferbar.



#### Abmessungen für 4D41-, 4D46-, 4D56-

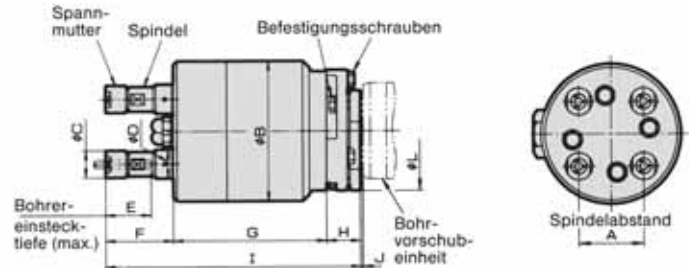

#### Abmessungen für 4D63-

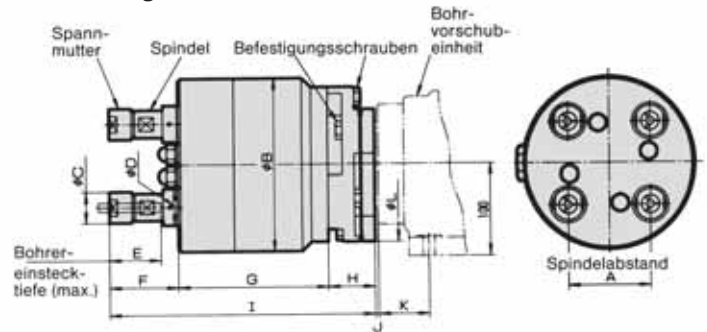

#### Abmessungen (mm)

Modell-Nr.	A	B	C	D	E	F	G	H	I	J	K	L
4D41-845BP	17 ~ 23	108	14,8	16,8	30	43,5	117	26	186,5	1	-	92
4D46-845BP							133		202,5			
4D41-2075BP	23 ~ 77	148	21	22,5	35	52	117	26	195			
4D46-2075BP	23 ~ 77	148										
4D56-50130BP	41 ~ 68	148	34	40	56	75	160	39	274	2	55	128
	68 ~ 96	188										
4D63-50130BP	41 ~ 68	148										

Modell-Nr.	Spindelabstand Min. ~ Max.	Spannbereich	Bestell-Nr. Spannzange	Anwendbar für Modellnummern
4D41-845BP	17 ~ 23	0,8 ~ 5,0	Z-00845- $\phi$ Abstufung 0,1	E3C-6030 E3C-6022
4D46-845BP				E3C-1314 E3C-1309 E3C-1305 D3P-1326(L) D3P-1318(L) D3P-1314(L)
4D46-2075BP	23 ~ 77	1,0 ~ 7,5	Z-02075- $\phi$ Abstufung 0,1	D3P-1305(L) D3P-1302(L) D3P-1307(L) D3P-1306(L) E3C-1314 E3C-1309 E3C-1305 D3P-1310(L) DP-1306(L) D3P-1305(L) D3P-1302(L) D3P-1326(L) D3P-1318(L) D3P-1314(L) D4P-1330(L) D4P-1320(L) D4P-1314(L) D4P-1311(L) D3P-1307(L) D4P-1308(L) D4P-1306(L) D4P-1303(L) D4P-1302(L)
4D56-50130BP	41 ~ 96	2,0 ~ 13,0	Z-50130- $\phi$ Abstufung 0,1	D5P-1320 D5P-1314 D5P-1311
4D63-50130BP				D6P-2414 D6P-2411 D6P-2408 D5P-1308 D5P-1306 D5P-1304 D6P-2407 D6P-2406 E6P-2405 D5P-1303 D5P-1302 E6P-2404 E6P-2403 E6P-2402

1. Maximale Drehzahl 3000 U/min.

