



coil 22 mm

function	symbol	orifice mm	*Kv	pressure range (bar)			nominal power			TABLE A
				min.	max. DC	max. AC	Watt DC	V.A. AC		main code
								inr.	hol.	
3/2 normally closed (NC) 	1.2	0.5	0	-	10	-	9	7.5	N3B112	
	1.2	0.5	0	10	-	5	-	-	N3B612	
	1.6	1.1	0	-	7	-	9	7.5	N3B116	
	1.6	1.1	0	7	-	5	-	-	N3B616	
	2.0	1.5	0	5.6	-	5	-	-	N3B620	
	2.4	2.0	0	2.5	-	5	-	-	N3B624	
3/2 normally open (NO) 	1.2	0.5	0	-	10	-	9	7.5	N3B212	
	1.2	0.5	0	10	-	5	-	-	N3B712	
	1.6	1.1	0	-	7	-	9	7.5	N3B216	
	1.6	1.1	0	7	-	5	-	-	N3B716	
	2.0	1.5	0	5.6	-	5	-	-	N3B720	
	2.4	2.0	0	2.5	-	5	-	-	N3B724	


N	3	B				.				.	4		
---	---	---	--	--	--	---	--	--	--	---	---	--	--

main code	stem		seals		manual override		coil code
	code	material	code	material	code	type	
see table A on this page	B	stainless AISI 303	B	NBR	0	none	see table B on page 2/2
	C	brass*	V	FPM	1	brass scREW	
		*option: chem. nickel	E	EPDM	4	plastic lever	
			T	PTFE			



direct operated solenoid valves

coil 22 mm

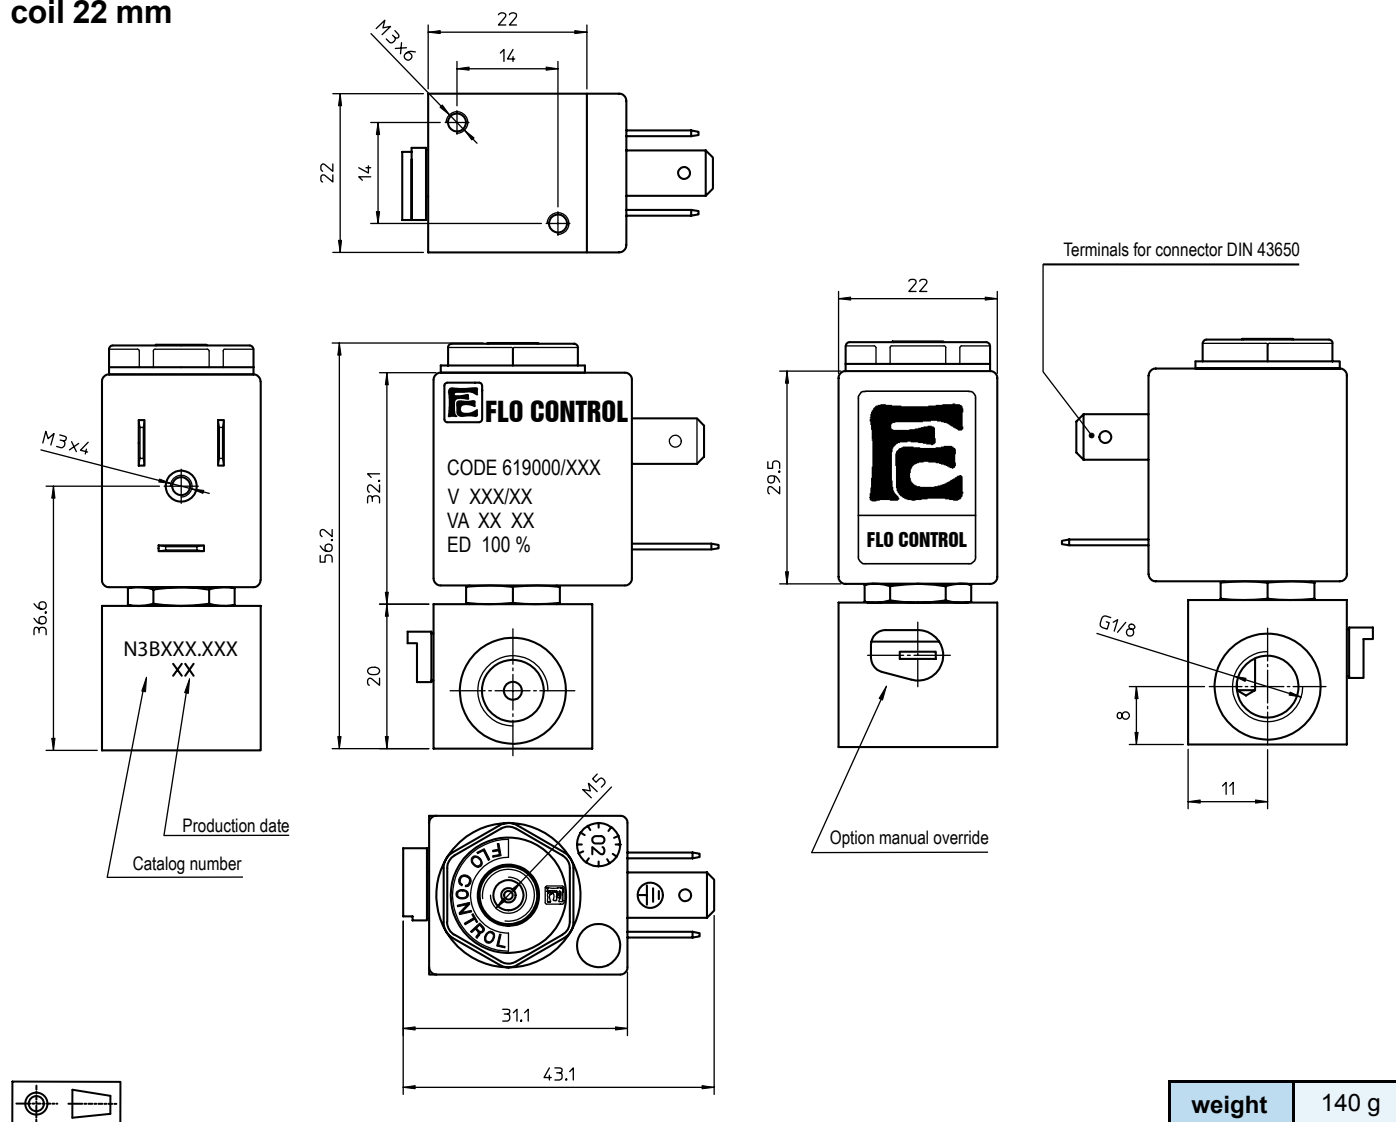

weight 140 g

coil code	TABLE B			
	*voltages	code		
		~ 50 Hz	~ 60 Hz	= DC
 CODE 619000/XXX V XXX/XX VA XX XX ED 100 %	6	-	-	461
	12	-	-	466
	24	411	444	471
	48	416	-	476
	110	421	-	481
	115	-	453	-
	220	431	-	491
	230	457	459	-

coil specification	
wire insulation	class H180° C
encapsulation	class F155° C
encapsulation mat.	nylon
energising duration	100% at +20° C ambient
voltage tolerance	- 10% +15% of nominal voltage
power consumption	AC 7,5 VA - DC 5 Watt
electrical connection	DIN 43650/B (2P+ earth)
cable connection	Pg 9 (for cable dia. 6-8mm)
protection class	IP 65 (with connector)

* other voltages and wattages on request

connector (not included, must be ordered separately)

code Z10030

FLO CONTROL
Solenoid Valves



Production
monitored
Safety tested

