



Solenoid valve 2/2 way N.C. Combined operation

21IH2K1V110
÷
21IH8K1V400-S

PRESENTATION:

Combined operation S.V. for interception of fluids compatible with the construction materials.
Minimum operational pressure is not required.
The materials used and the tests carried out ensure maximum reliability and duration.

USE: Automation - Heating - Chemistry

PIPES: G 1/4 - G 1 1/2

COILS:

8W - Ø 13	
BDA - BSA	155°C (class F)
BDV	180°C (class H)
12W - Ø 13	
UDA	155°C (class F)
14W - Ø 13	
GDA - GDS	155°C (class F)
GDH - GDV	180°C (class H)

**COIL HOUSING AND COIL FORMER MATERIAL ARE
MADE BY 100% VIRGIN MATERIAL.**

Max. allowable pressure (PS) 16 bar


Ambient temperature:

See coils catalogue page for its compatibility.



CE Approval

(Pressure Equipment Directive 2014/68/EU)
for S.V. 21IH7÷21IH8..-S



Gaskets	Temperature		Medium
V=FKM + PA (fluoroelastomer+polyamide)	- 10°C	+140°C	Mineral oils (2°E), gasoline gas oil
B= NBR + PA (nitrile rubber+polyamide)	- 10°C	+ 90°C	Air, inert gas, water

For seals other than FKM replace the letter "V" with the ones corresponding to the other seals. E.I. 21IH3K1**B**150.


Pipe ISO 228/1	Code	Max viscosity		Ø mm	Kv l/mn	Power watt	Pressure		
		cSt	°E				min bar	M.O.P.D. AC bar DC bar	
G 1/4	21IH2K1V110	12	~ 2	11	20	8	0	14	6
						12		-	14
G 3/8	21IH3K1V150			15	40	8		14	6
						12		-	14
G 1/2	21IH4K1V160			16	50	8		14	6
						12		-	14
G 3/4	21IH5K1V200			20	60	8		14	6
						12		-	14
G 1	21IH6K1V250			25	140	8		14	3
						12		-	8
						14		-	14
G 1 1/4	21IH7K1V350			35	300	8		8	-
						12		14	-
						14		-	2
	21IH7K1V350-S					8		-	1
						12		-	4
						14		-	7
G 1 1/2	21IH8K1V400			40	320	8		8	-
						12		14	-
						14		-	2
	21IH8K1V400-S				8	-		1	
					12	-		4	
					14	-		7	

The "ODE" reserves the right to carry out technical and aesthetic modifications without prior notice.

23-06-2023

ODE

21IH2K1V110÷21IH8K1V400-S

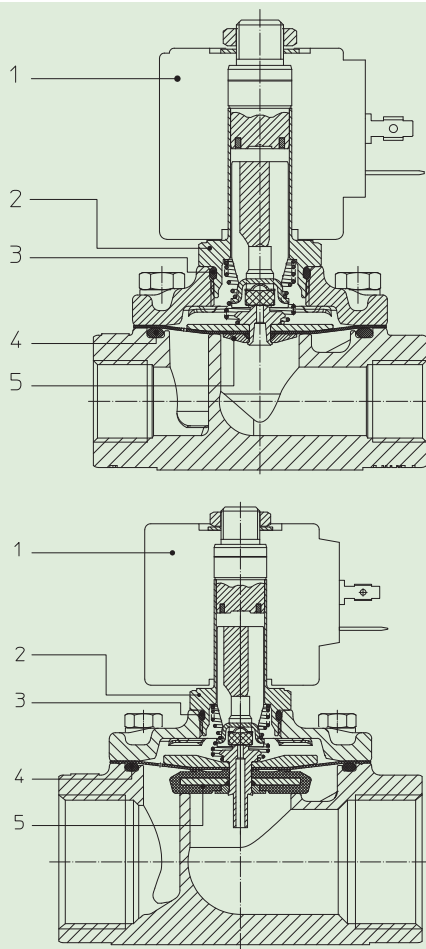

MATERIALS:

Body	Stainless steel AISI 316
Armature tube	Stainless steel AISI 316
Fixed core	Stainless steel AISI series 400
Plunger	Stainless steel AISI series 400
Phase displacement ring	Gold plated copper
Spring	Stainless steel AISI series 300
Seal	Standard: V=FKM+PA On request: B=NBR+PA
Orificie	Stainless steel AISI 316

On request:

Connector	Pg 9 o Pg 11
Connector conformity	ISO 4400

FEATURES:


Electrical conformity	IEC 335
Protection degree	IP 65 EN 60529 (DIN 40050) with coil fitted by connector.

SPARE PARTS:

1. Coil:	G 1	Code R452846/V
See coils list	G 1 1/4 ÷ G 1 1/2	Code R452904/V
2. Complete armature tube:		Code R453598/V (for versionS)
3. Gasket O-Ring:		Code R990000/V
4. Gasket O-Ring:		G 1/4 ÷ G 1/2
G 1/4 ÷ G 1/2	Code R990105/V	KTGIH3K1V15=4+5
G 3/4	Code R992103/V	G 3/4
G 1	Code R992109/V	KTGIH5K1V20=4+5
G 1 1/4 ÷ G 1 1/2	Code R992101/V	G1
5. Complete diaphragm with plunger:		KTGIH6K1V25=4+5
G 1/4 ÷ G 1/2	Code R452894/V	G 1 1/4 ÷ G 1 1/2
G 3/4	Code R452899/V	KTGIH7K1V35=4+5
		KTGIH7K1V35-S=4+5 (for version....S)

MAINTENANCE KIT:

DIMENSIONS:

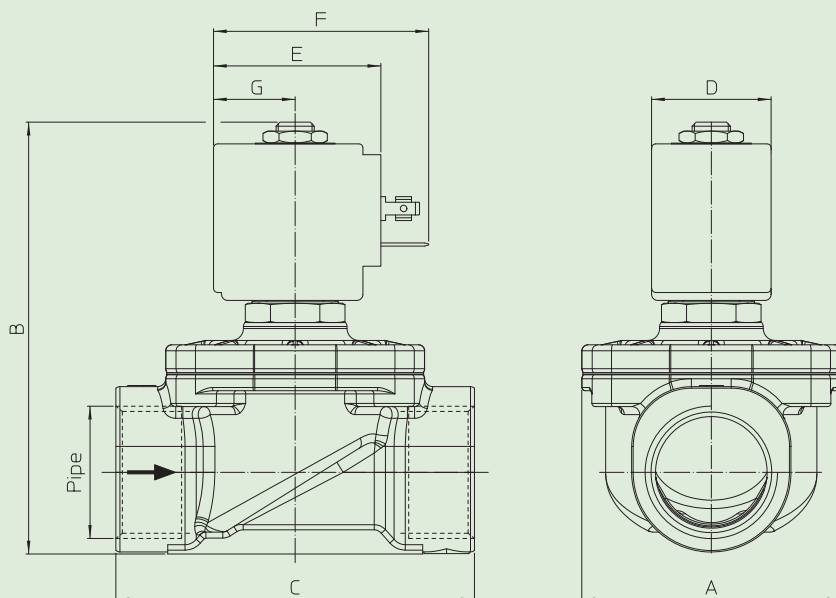

Type	Pipe ISO 228/1	A mm	B mm	C mm
21IH2K1V110	G 1/4	52	87	56
21IH3K1V150	G 3/8		92	68
21IH4K1V160	G 1/2		100	75
21IH5K1V200	G 3/4	58	109	90
21IH6K1V250	G 1	65	109	90
21IH7K1V350	G 1 1/4	94	126	128
21IH7K1V350-S				
21IH8K1V400				
21IH8K1V400-S	G 1 1/2			

COIL TYPE	POWER ABSORPTION			DIMENSIONS			
	W ---	Hold VA ~	Inrush VA ~	D mm	E mm	F mm	G mm
B	8	14,5	25	30	42	54	20,5
U	12	23	35	36	48	60	23,5
G	14	27	43	52	55	67	25