




Endschalterbox, Aluminium, 1x Winkelsensor 4-20 mA

Limit switch box, Aluminium, 1x position transmitter 4-20 mA

Artikelnummer Part number	CFC-4-20mA
Endschaltertyp Switch type	WS-4-20MA-360°
Spannung/Strom Voltage/Current	VSUP: 11-30 V / 4-20 mA analog output
IP-Schutz IP protection	IP66/IP67/IP68
SIL Level SIL level	SIL 1-3
Umgebungstemperatur Ambient temperature	-25...+80°C
Gehäuse Material Housing material	Aluminium, PC, EPDM, NBR
Anschlüsse Connections	1x M20x1,5





Klemmplan Wiring diagram



W009



MaßzeichnungDimensions

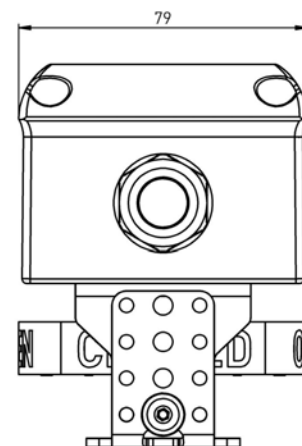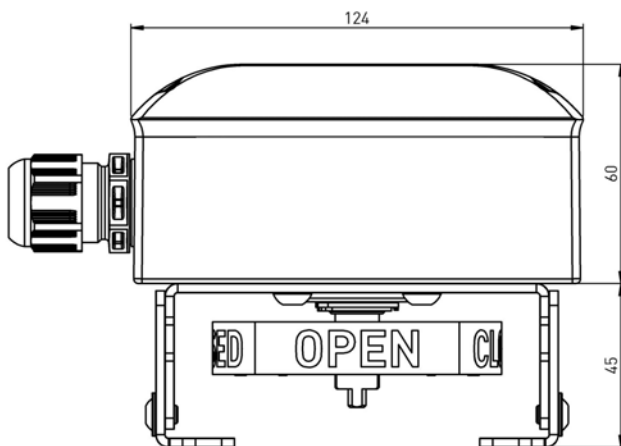

Enthaltenes Zubehör Included Accessories

-MBH01 **Edelstahl-Montagebrücke, verstellbar, 80x30x20mm (1.4301)**
Stainless steel bracket, adjustable, 80x30x20mm (AISI 304)

Besonderheiten Extras

- Deckel ohne Sichtfenster, OPEN-CLOSED Anzeige unter der Box
- Stromaufnahme (ohne Last): < 14 mA
- Ausgangsbelastung: = 500 Ohm, Drehsinn: CW/CCW
- elektrisch wirksame Drehwinkel [°]
- Messbereich: 0 - 360° (pre-set: 0 - 90°)
- Schaltpunkte einstellbar, Auflösung: 12 Bit
- Absolute Linearität: 0,1% gem. IEC 60393
- EN 61000-4-3 I-6 I-8: Class A, EN 61000-4-2: Class B

- Cover without indication window, OPEN-CLOSED indicator below the box
- Current consumption (no load): < 14 mA
- Initial load: = 500 Ohm, Rotation: CW/CCW
- electrically effective rotation [°]
- Measuring range: 0 - 360° (pre-set: 0 - 90°)
- switching points adjustable, resolution: 12 Bit
- absolute linearity: 0,1% acc. IEC 60393
- EN 61000-4-3 I-6 I-8: Class A, EN 61000-4-2: Class B