

251





| MODEL NO | SİYAH (BLACK) | F1 (N) | F2 (N) | F3 (N) | F4 (N) | Fi                         |                            | AÇI (ANGLE) (± 5 °) | AĞIRLIK (WEIGHT) (gr) |
|----------|---------------|--------|--------|--------|--------|----------------------------|----------------------------|---------------------|-----------------------|
|          |               |        |        |        |        | (X1) VERİM (YIELD) (F1:Fi) | (X2) VERİM (YIELD) (F2:Fi) |                     |                       |
| 251-2    | B251-....     | 470    | 380    | 700    | 560    | 3:1                        | 2:1                        | 90°                 | 65                    |
| 251-3    | B251-....     | 1400   | 1030   | 1625   | 1200   | 3:1                        | 2:1                        | 90°                 | 270                   |
| 251-4    | B251-....     | 2000   | 1370   | 3370   | 2445   | 4:1                        | 2.5:1                      | 90°                 | 710                   |

F1 - F2 : BASKI KUVVETİ ( EXERTING FORCE ) , F3 - F4 : TUTMA KAPASİTESİ ( HOLDING CAPACITY ) , Fi : UYGULAMA KUVVETİ ( APPLIED FORCE )



251-L

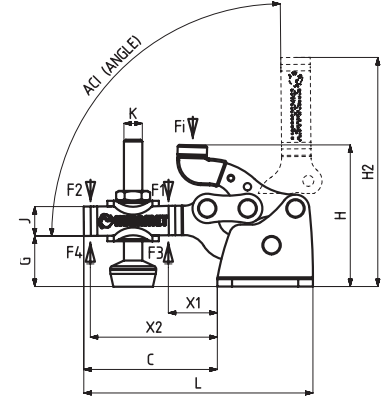

**Ayak Tipi: Yatay Tabanlı**  
Body Mounting Base: Horizontal



211

Sayfa/Page: 17



111

Sayfa/Page: 6



251-L

Sayfa/Page: 35

**Kilitli / Locked**

| MODEL NO | A  | B  | C  | D  | E ~  | F ~     | G  | H  | H2  | J  | K   | L   | N       | X1 | X2 |
|----------|----|----|----|----|------|---------|----|----|-----|----|-----|-----|---------|----|----|
| 251-2    | 26 | 27 | 36 | 17 | 13,5 | 16 - 18 | 14 | 38 | 62  | 8  | M5  | 62  | 4.5x5.5 | 19 | 27 |
| 251-3    | 44 | 47 | 56 | 27 | 23   | 29 - 31 | 24 | 63 | 100 | 13 | M8  | 100 | 7.5x8.5 | 27 | 43 |
| 251-4    | 64 | 63 | 79 | 37 | 35   | 38 - 41 | 36 | 93 | 143 | 19 | M10 | 143 | 9x10.5  | 39 | 63 |

252




| MODEL NO | SİYAH (BLACK) | F1 (N) | F2 (N) | F3 (N) | F4 (N) | Fi                         |                            | AÇI (ANGLE) (± 5 °) | AĞIRLIK (WEIGHT) (gr) |
|----------|---------------|--------|--------|--------|--------|----------------------------|----------------------------|---------------------|-----------------------|
|          |               |        |        |        |        | (X1) VERİM (YIELD) (F1:Fi) | (X2) VERİM (YIELD) (F2:Fi) |                     |                       |
| 252-2    | B252-....     | 470    | 380    | 700    | 560    | 3:1                        | 2:1                        | 90°                 | 65                    |
| 252-3    | B252-....     | 1400   | 1030   | 1625   | 1200   | 3:1                        | 2:1                        | 90°                 | 270                   |
| 252-4    | B252-....     | 2000   | 1370   | 3370   | 2445   | 4:1                        | 2.5:1                      | 90°                 | 710                   |

F1 - F2 : BASKI KUVVETİ ( EXERTING FORCE ) , F3 - F4 : TUTMA KAPASİTESİ ( HOLDING CAPACITY ) , Fi : UYGULAMA KUVVETİ ( APPLIED FORCE )



252-L

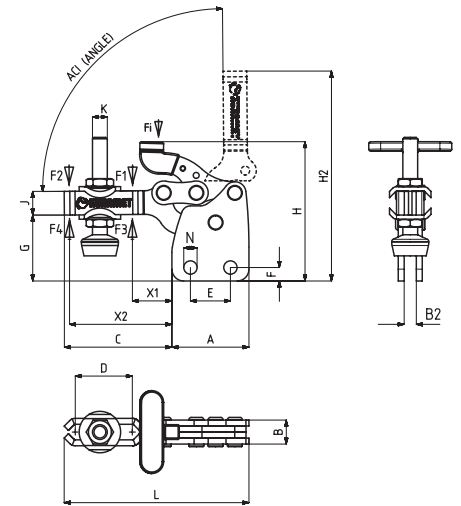

**Ayak Tipi: Dikey Tabanlı**  
Body Mounting Base: Vertical



252-L

Sayfa/Page: 35



212

Sayfa/Page: 19



112

Sayfa/Page: 8

**Kilitli / Locked**

| MODEL NO | A  | B  | B2 | C  | D  | E ~  | F ~ | G    | H     | H2    | J  | K   | L   | N     | X1 | X2 |
|----------|----|----|----|----|----|------|-----|------|-------|-------|----|-----|-----|-------|----|----|
| 252-2    | 26 | 8  | 4  | 36 | 17 | 13,5 | 4,5 | 22   | 47    | 71    | 8  | M5  | 62  | Ø 4.5 | 19 | 27 |
| 252-3    | 44 | 12 | 6  | 56 | 27 | 23   | 8   | 39,5 | 79    | 116,5 | 13 | M8  | 100 | Ø 7.5 | 27 | 43 |
| 252-4    | 64 | 16 | 8  | 79 | 37 | 35   | 11  | 56,5 | 114,5 | 164   | 19 | M10 | 143 | Ø 9   | 39 | 63 |